




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

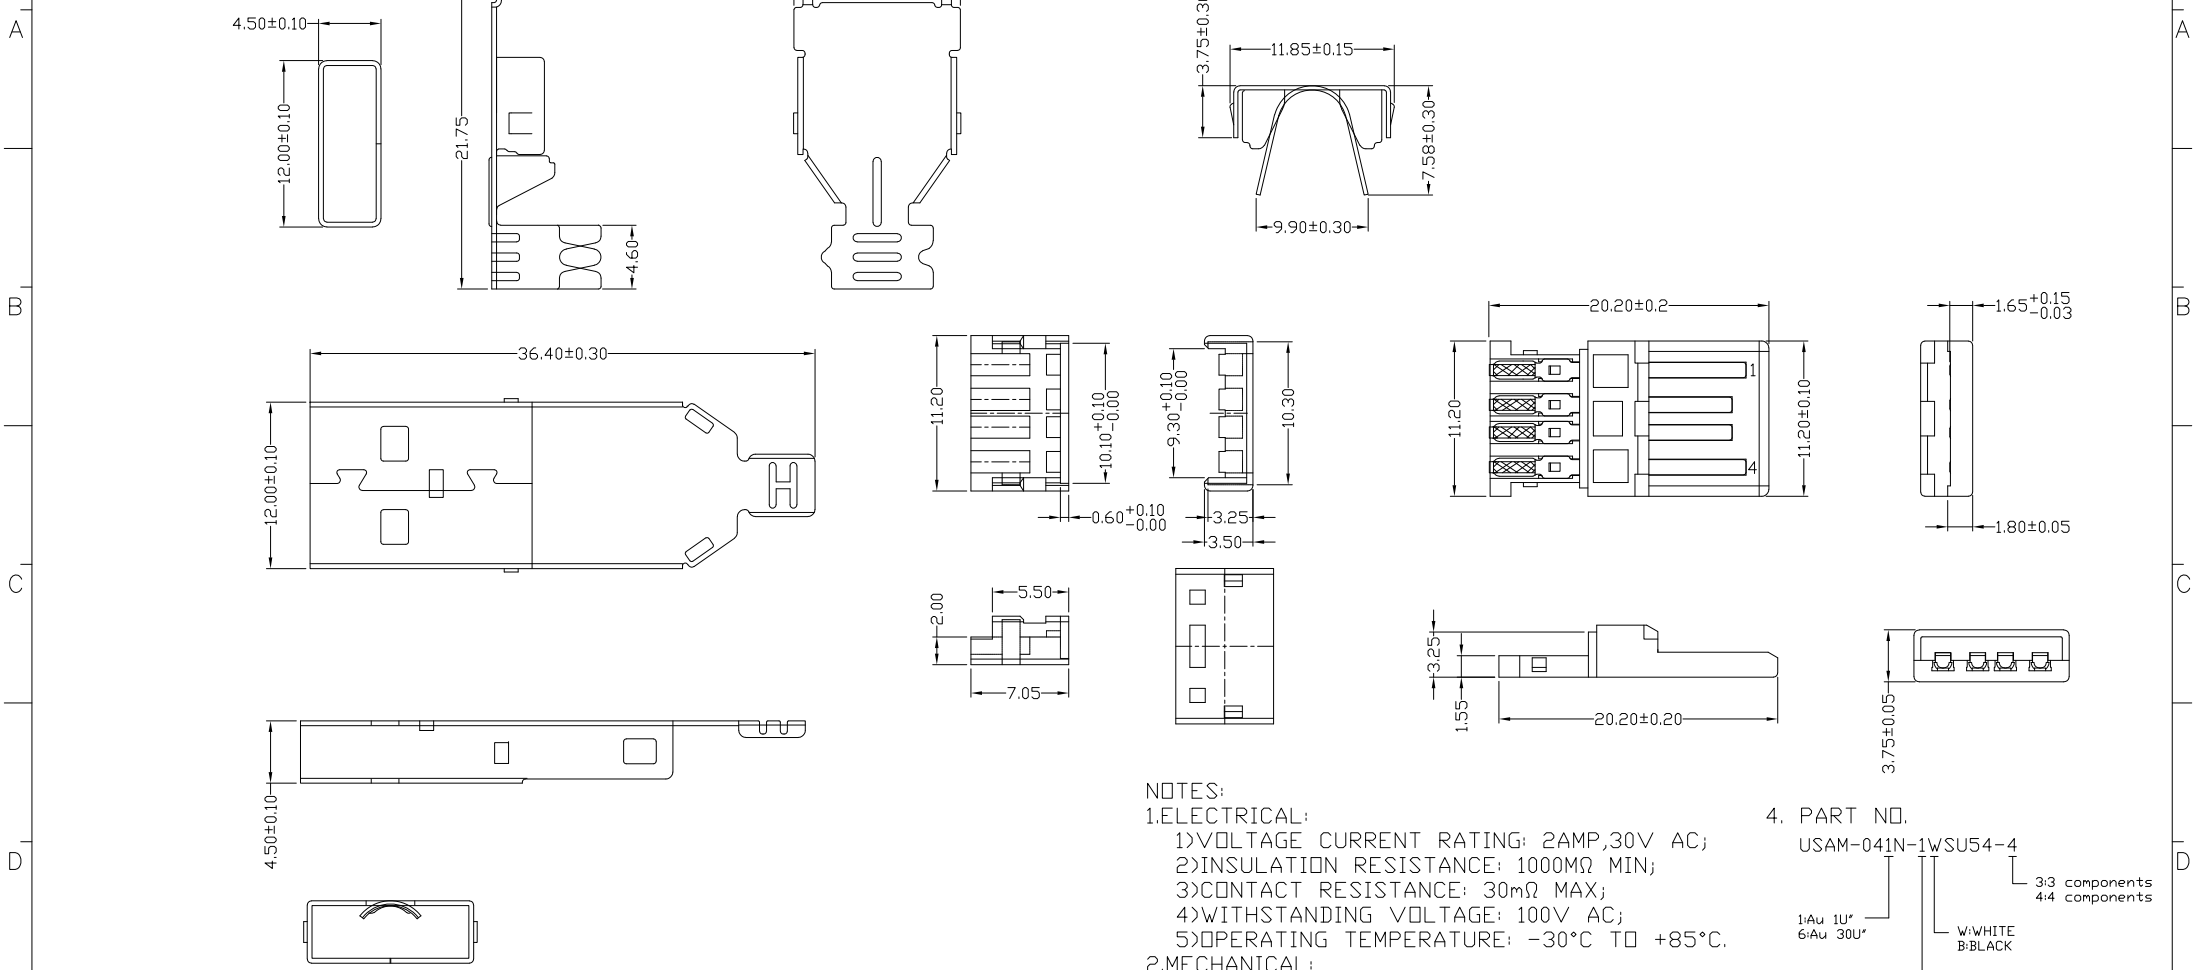

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +85°C.
- MECHANICAL:
 - MATING FORCE: 35N MAX.
 - UNMATING FORCE: 10N MIN.
- DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAM-041N-1WSU54-4
1:1Au 1U*
6:1Au 30U*
3:3 components
4:4 components
W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCPC

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
4	UP SHELL	SPCC	1	PLATED NICKEL	.X ±0.30	.X* ±5*	UNITS	mm
3	DOWN SHELL	SPCC	1	PLATED NICKEL	.XX ±0.20	.XX* ±2*	MAT'L	
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.10		SEE NOTE	
1	HOUSING	PBT+30%GF	2				FINISH	SEE NOTE
							Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: USB AM 焊线式 四件套 L=36.4mm		PART NO.: USAM-04XN-1XSU54-4	
DR: <i>Ricky</i> 2025/03/12		DWG NO.: AII-SU54-4	
CHKD: <i>Ricky</i> 2025/03/12		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER
		B	DRAWING

