

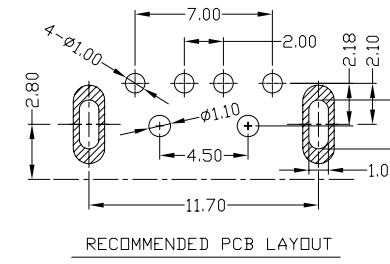




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

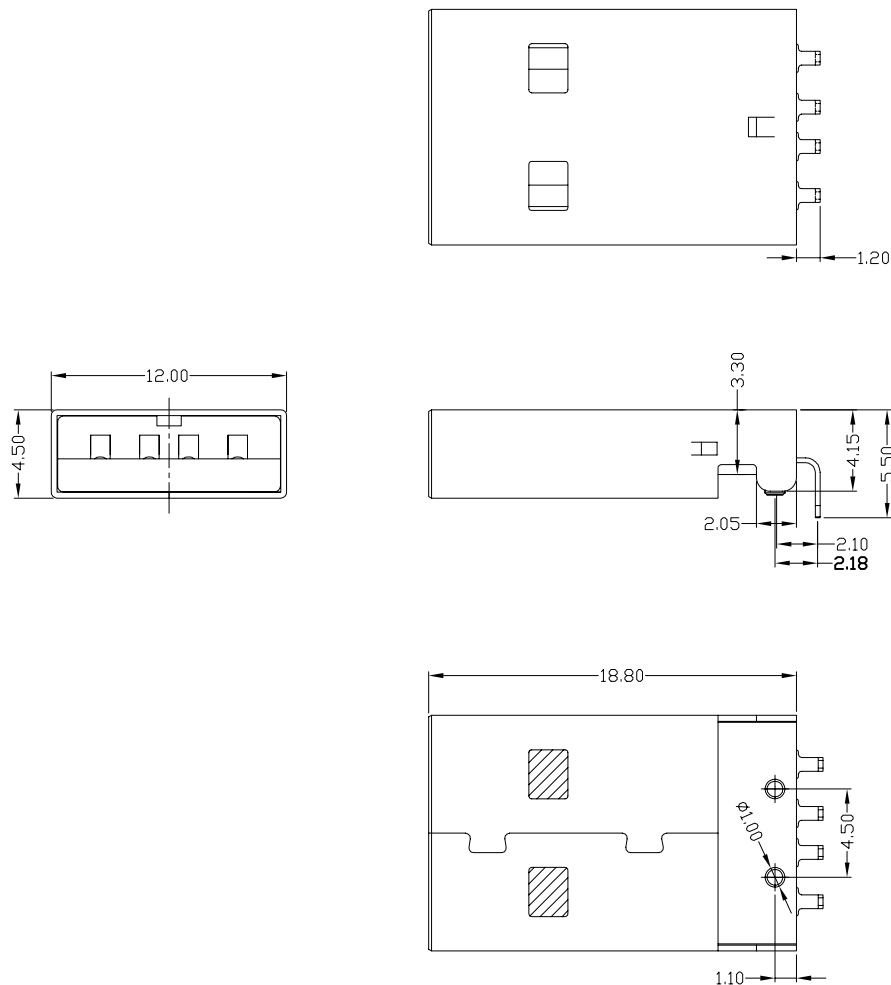

NOTES:

1. ELECTRICAL:
  - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
  - 2) INSULATION RESISTANCE: 1000M $\Omega$  MIN;
  - 3) CONTACT RESISTANCE: 30m $\Omega$  MAX;
  - 4) WITHSTANDING VOLTAGE: 500V AC;
  - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
  - 1) Mating Force: 35N MAX
  - 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-04\*N-1\*R83

1Au 1U\*  
6Au 30U\*

W: WHITE  
B: BLACK

1-PBT  
2-PA6T  
3-PA9T  
4-LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. $\pm 0.35$	X.* $\pm 2^*$	UNITS	mm
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0	.X $\pm 0.3$	.X* $\pm 1^*$	MAT'L	
2	SHELL	SPCC	1	PLATED NICKEL	.XX $\pm 0.25$	.XX*	SEE NOTE	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX $\pm 0.15$	.XXX*	FINISH	
							SEE NOTE	
							Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

APPD: gan 2013/5/4

SCALE: 1:1

SHEET: 1/1

REV: B

CUSTOMER DRAWING

雅安科技有限公司  
ACCURATE INNOTECH INC.

TITLE: USB AM 90° DIP 短体(短脚)

PART NO.: USAM-04\*N-1\*R83

DR: gan 2013/5/4

DWG NO.: AII-R83

CHKD: gan 2013/5/4