

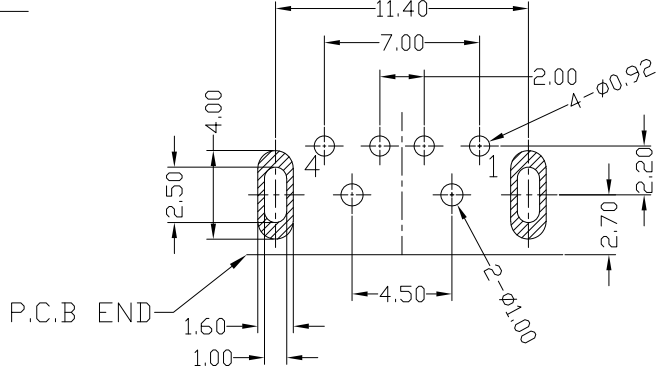
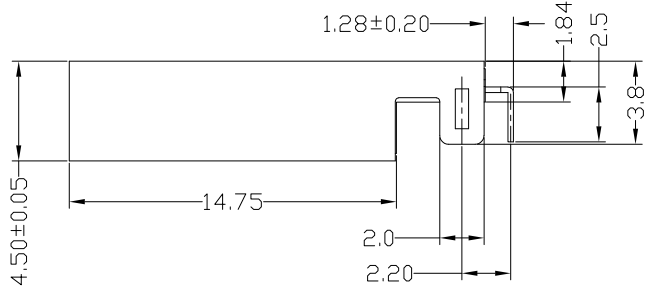





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

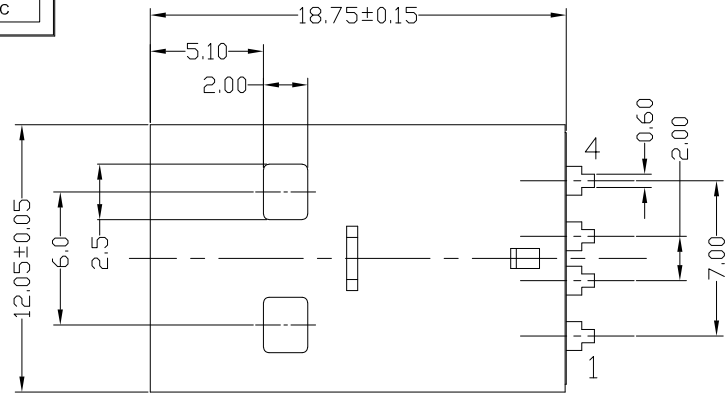


Recommend P.C.B Layout

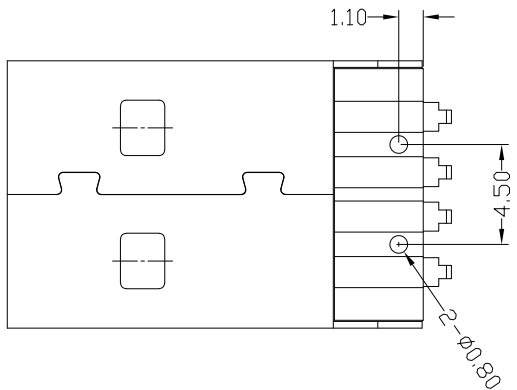

NOTES:

- 1.ELECTRICAL:
 - 1)VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2)INSULATION RESISTANCE: 1000MΩ MIN;
 - 3)CONTACT RESISTANCE: 30mΩ MAX;
 - 4)WITHSTANDING VOLTAGE: 500V AC;
 - 5)OPERATING TEMPERATURE:-45°C TO +85°C.
- 2.Mechanical:
 - 1)Mating Force: 35N MAX
 - 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	.X	±0.30	.X*	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
5					.X	±0.30	.X*	MAT'L		TITLE: USB AM 90° DIP 沉板 直脚3.8			
4					.XX	±0.30	.XX*	SEE NOTE					
3	HOUSING	PA6T	1	UL94V-0	.XXX		.XXX*	FINISH		DR: Ricky 2023/06/26			
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN				SEE NOTE					
1	SHELL	SPCC	1	PLATED NICKEL				Q'TY		CHKD: Ricky 2023/06/26			
										APPD:			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

