


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

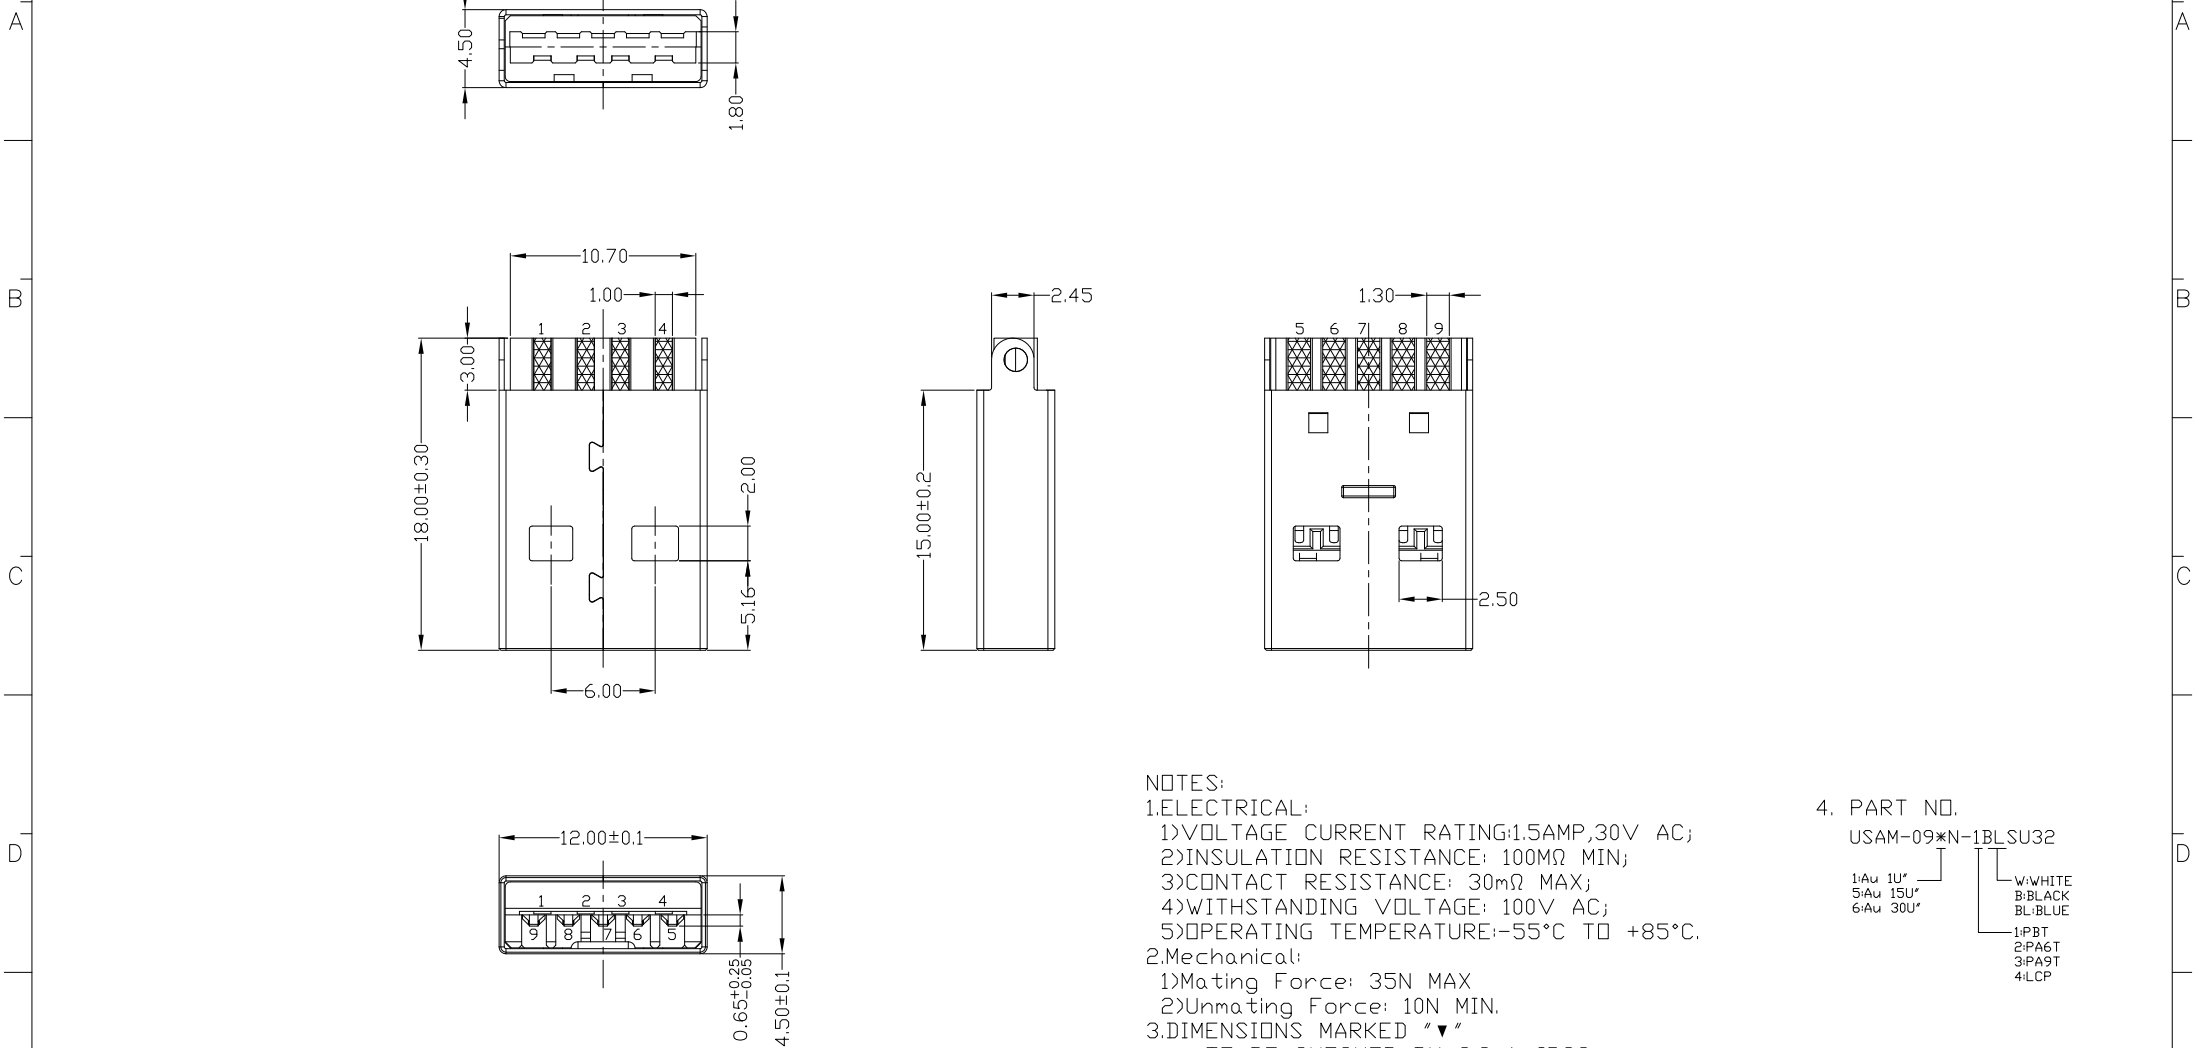

NOTES:  
 1.ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;  
 2) INSULATION RESISTANCE: 100MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 100V AC;  
 5) OPERATING TEMPERATURE: -55°C TO +85°C.  
 2.Mechanical:  
 1) Mating Force: 35N MAX  
 2) Unmating Force: 10N MIN.  
 3. DIMENSIONS MARKED "▼"  
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USAM-09\*N-1BLSU32  
 1: Au 1U\*  
 5: Au 15U\*  
 6: Au 30U\*  
 1: V: WHITE  
 2: B: BLACK  
 3: BL: BLUE  
 1: PBT  
 2: PA6T  
 3: PA9T  
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
4	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'
3	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX'
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC	

**雅安科技有限公司**  
**ACCURATE INNOTECH INC.**

TITLE: USB AM 3.0 短体  
 手工焊线一体式

DR: *Ricky* 2019/2/19

CHKD: *Ricky* 2019/2/19

APPD:

PART NO.: USAM-09XN-1BLSU32

DWG NO.: AII-SU32

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	