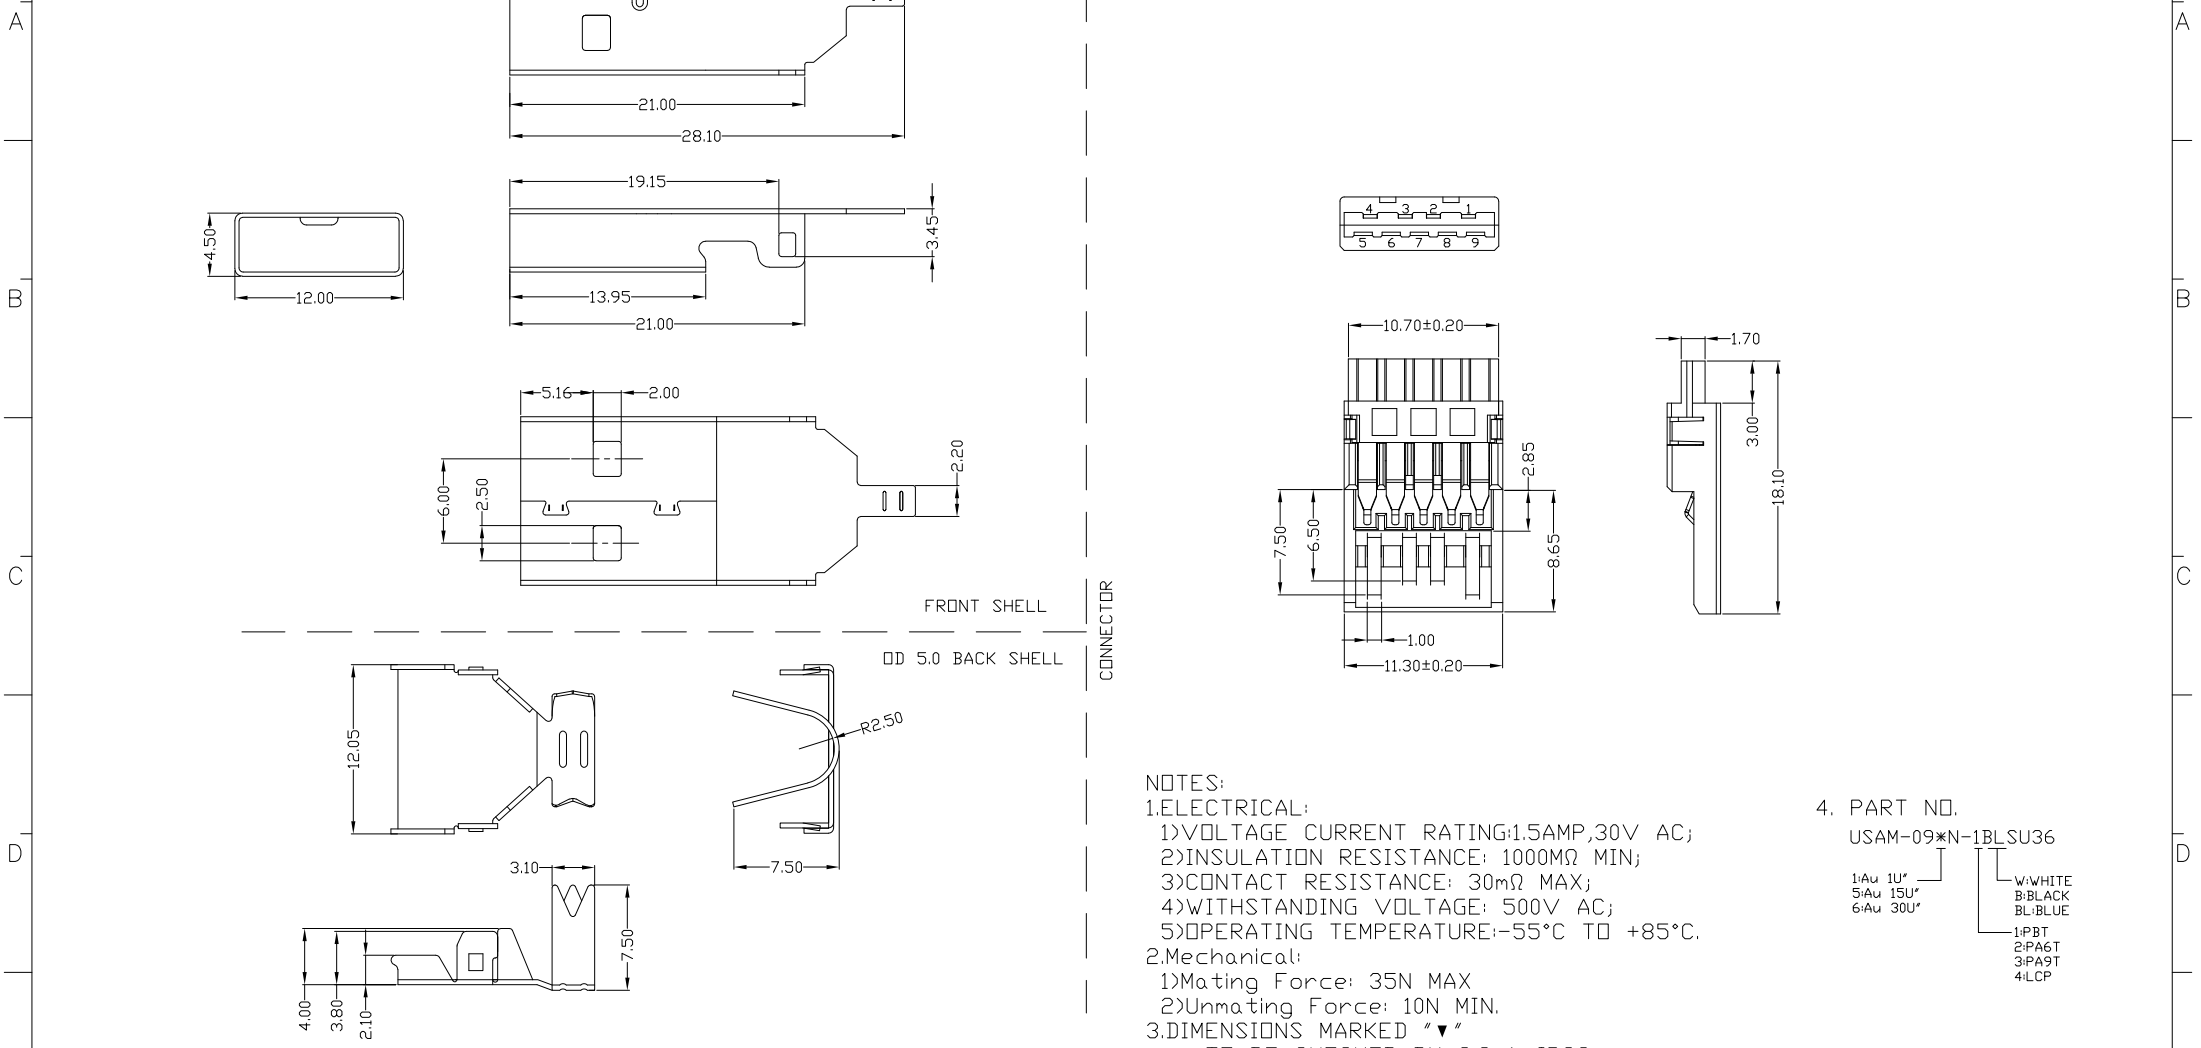

RoHS Compliant
 2002/95/EC
 Process Capable


REV	LTR	DESCRIPTION	DATE	REVISER	APPD



NOTES:
 1.ELECTRICAL:
 1)>VOLTAGE CURRENT RATING:1.5AMP,30V AC;
 2)>INSULATION RESISTANCE: 1000MΩ MIN;
 3)>CONTACT RESISTANCE: 30mΩ MAX;
 4)>WITHSTANDING VOLTAGE: 500V AC;
 5)>OPERATING TEMPERATURE:-55°C TO +85°C.
 2.Mechanical:
 1)>Mating Force: 35N MAX
 2)>Unmating Force: 10N MIN.
 3.DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USAM-09*N-1BLSU36
 1:Au 1U*
 5:Au 15U*
 6:Au 30U*
 1:V:WHITE
 2:BLACK
 3:BLUE
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
4	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	MAT'L	TITLE: USB AM 3.0 短28mm 手工 焊线三件套0D5.0				
3	SHELL	SPCC	2	PLATED NICKEL	.X ±0.3	.X' ±1'						SEE NOTE
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH	DR: Ricky 2019/2/20				
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX'						SEE NOTE
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		Q'TY	CHKD: Ricky 2019/2/20				
								APPD:				
								SCALE: 1:1		SHEET: 1/1		REV. B
							CUSTOMER DRAWING					