




**RoHS
Compliant**
2002/95/EC

REV.	ECN.	NO.	APPD.

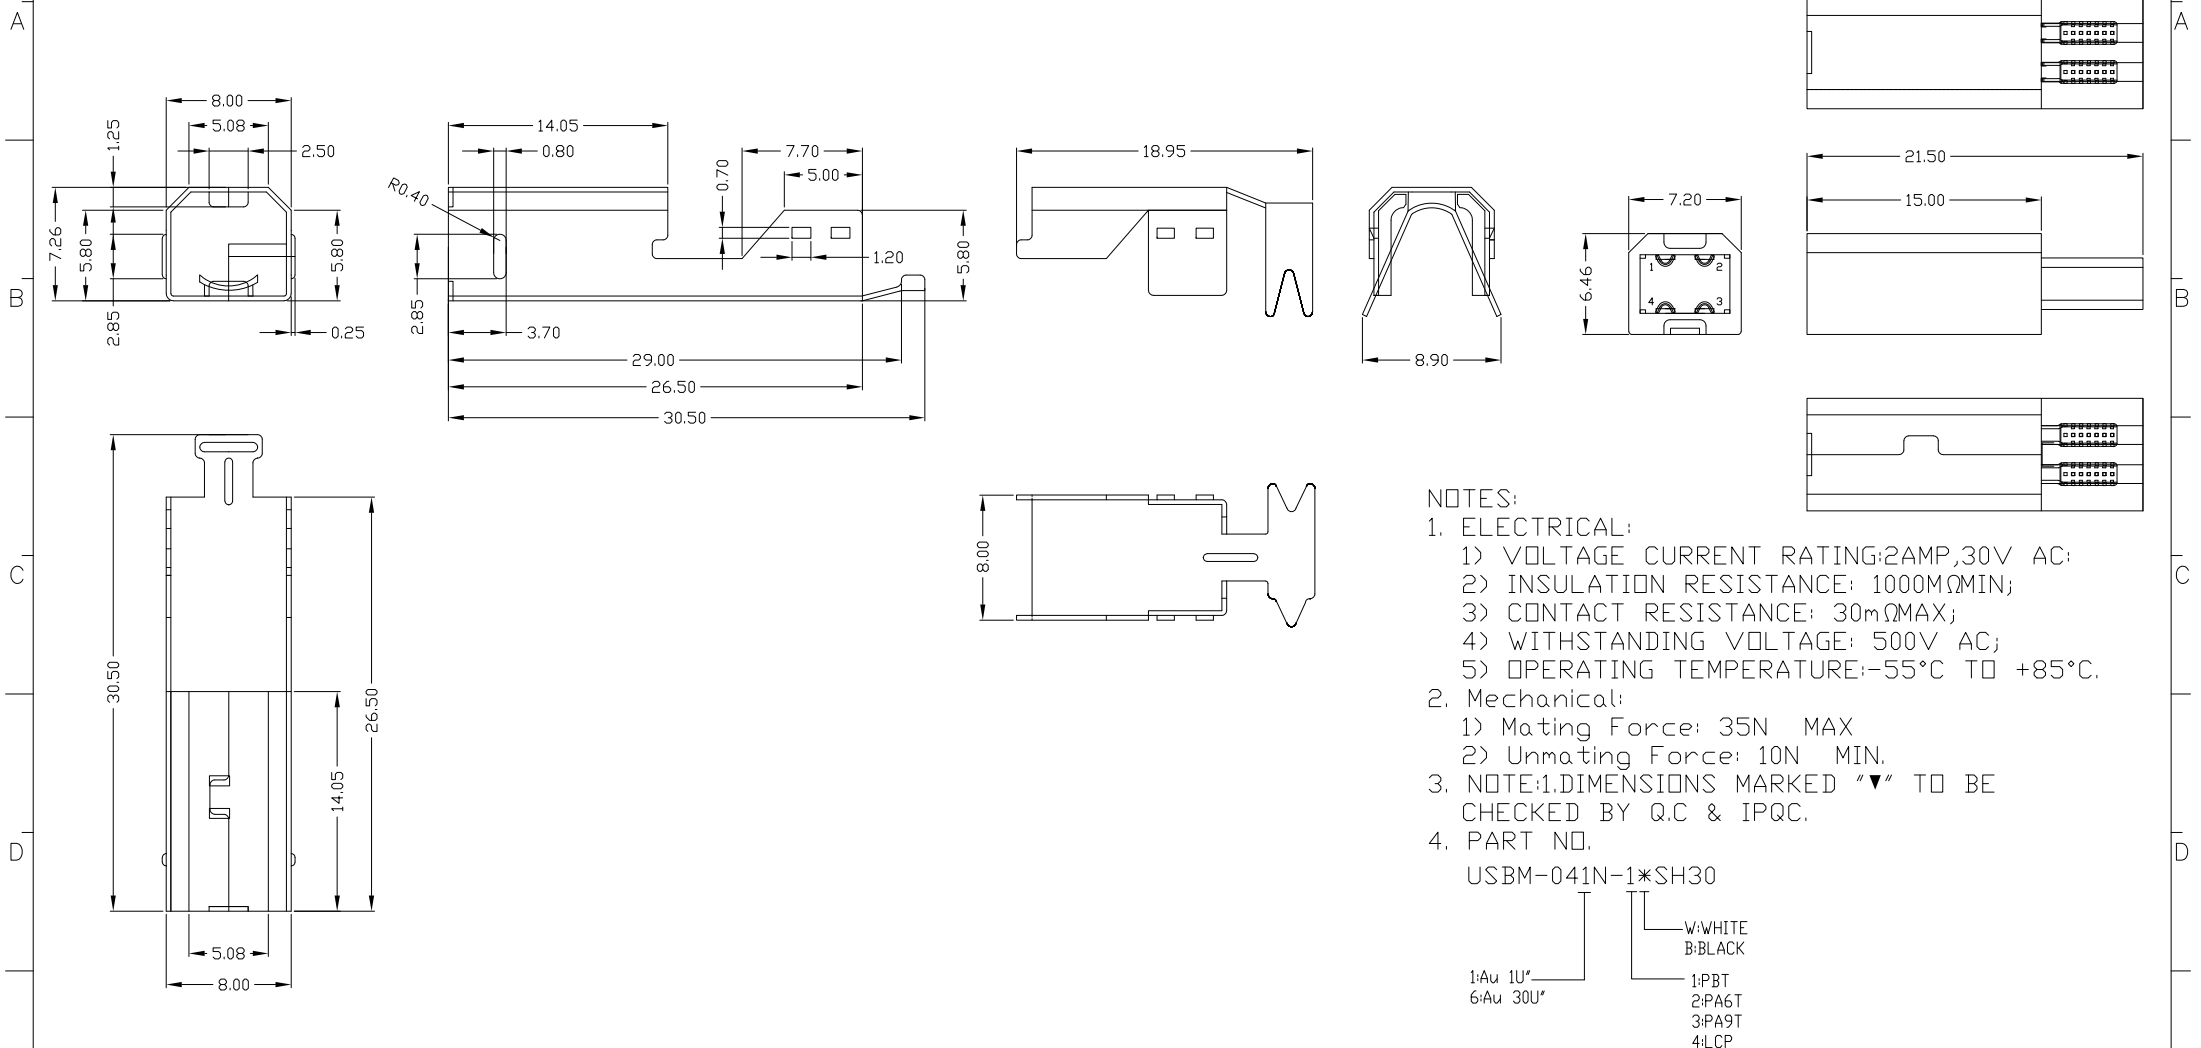

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
 - PART NO.
USBM-041N-1*SH30

1: Au 1U"
6: Au 30U"
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING					
3	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.* ±2'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC. TITLE: USB BM 焊线三件式 短壳 PART NO.: USBM-04*N-1*SH30 DR: Ricky 2022/3/28 DWG NO.: AII-SH30 CHKD: Ricky 2022/3/28 APPD:
2	SHELL	SPCC-SD	1	PLATED NICKEL	.X ±0.3	.X* ±1'	MAT'L	SEE NOTE	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	SEE NOTE	
					.XXX ±0.15	.XXX'	Q'TY		
							<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>		SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING