




RoHS Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

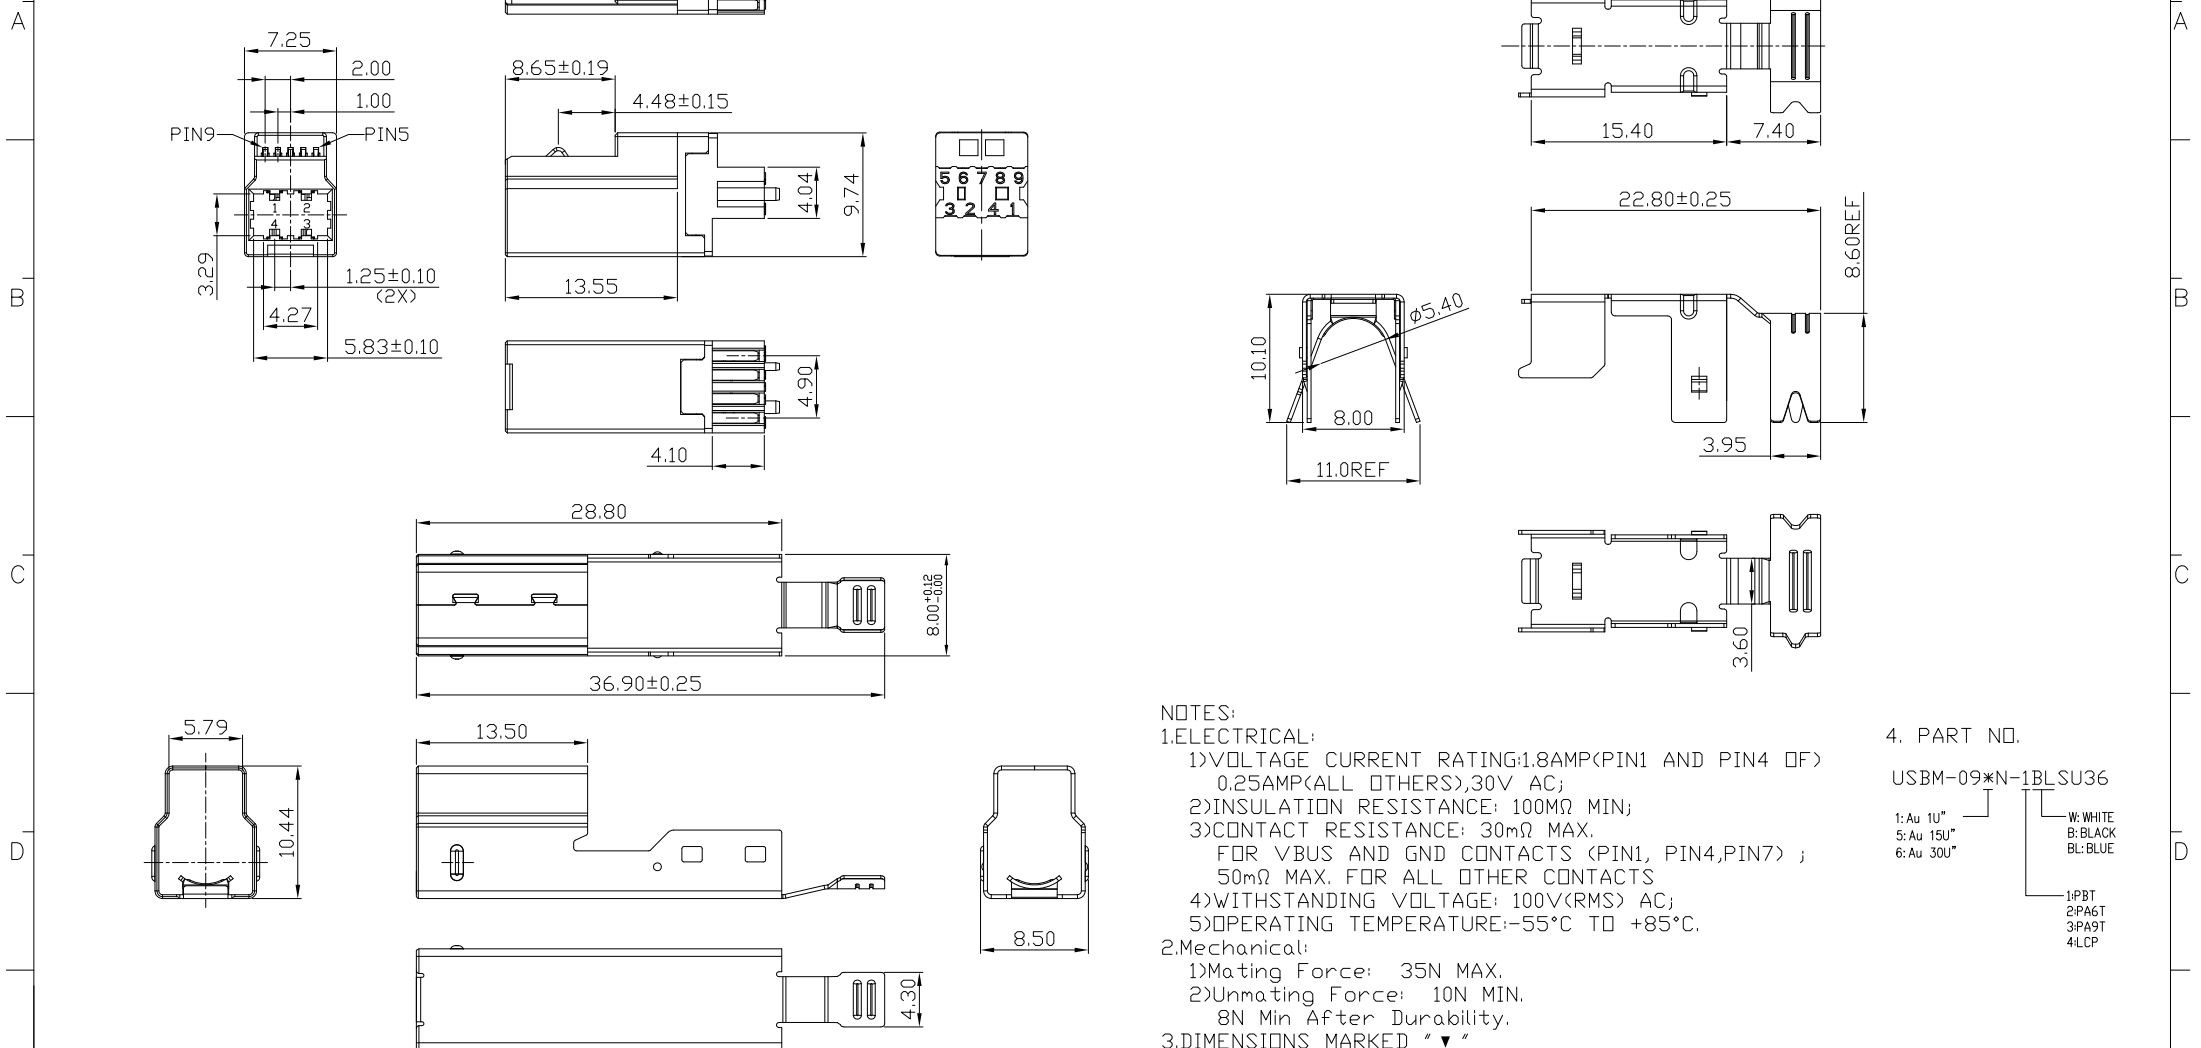

NOTES:
 1.ELECTRICAL:
 1)VOLTAGE CURRENT RATING:1.8AMP(PIN1 AND PIN4 OF)
 0.25AMP(ALL OTHERS),30V AC;
 2)INSULATION RESISTANCE: 100MΩ MIN;
 3)CONTACT RESISTANCE: 30mΩ MAX.
 FOR VBUS AND GND CONTACTS (PIN1, PIN4,PIN7) ;
 50mΩ MAX. FOR ALL OTHER CONTACTS
 4)WITHSTANDING VOLTAGE: 100V(RMS) AC;
 5)OPERATING TEMPERATURE:-55°C TO +85°C.
 2.Mechanical:
 1)Mating Force: 35N MAX.
 2)Unmating Force: 10N MIN.
 8N Min After Durability.
 3.DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USBM-09*N-1BLSU36
 1: Au 1U"
 5: Au 15U"
 6: Au 30U"
 W: WHITE
 B: BLACK
 BL: BLUE
 1:PBT
 2:PA6T
 3:PA9T
 4:LCF

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	.X ±0.38	X.* ±3*	UNITS	mm
5					.XX ±0.25	.X* ±3*	MAT'L	
4	HOUSING	PBT+30%GF	1	UL94V-0	.XXX ±0.20	.XX* ±3*	SEE NOTE	
3	SHELL	SPCC	2	PLATED NICKEL			FINISH	
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN			SEE NOTE	
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN			Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE: USB 3.0 BM 手工焊线款三件套 OD=5.5 外壳带卡凸

DR: *Ricky* 2019/08/26

CHKD: *Ricky* 2019/08/26

APPD:

PART NO.: USBM-09XN-1BLSU36

DWG NO.: AII-SU36

SCALE	SHEET	REV.	CUSTOMER
1:1	1/1	B	DRAWING