








RoHS  
Compliant  
2002/95/EC


USCF-061N-4BPZ20	10.0	8.5	0.40
USCF-061N-4BPZ21	10.5	9.0	0.90
P/N:	DIM A	DIM B	DIM C

REV.	ECN.	NO.	APPD.

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

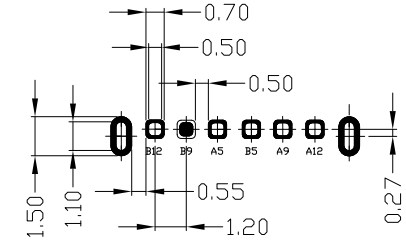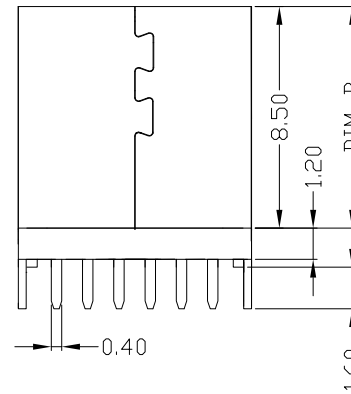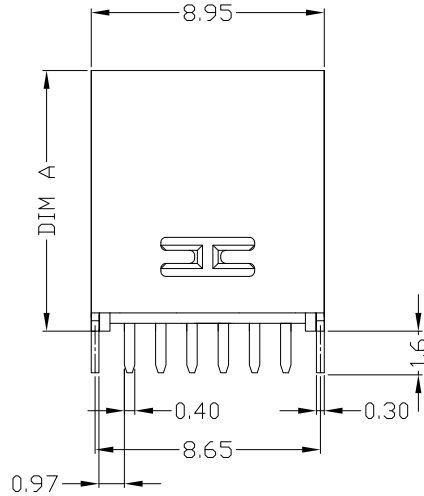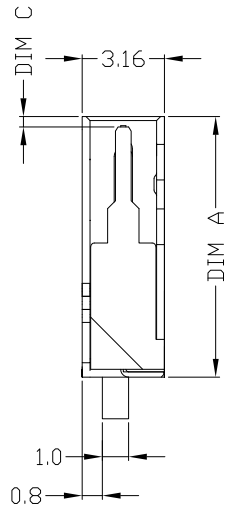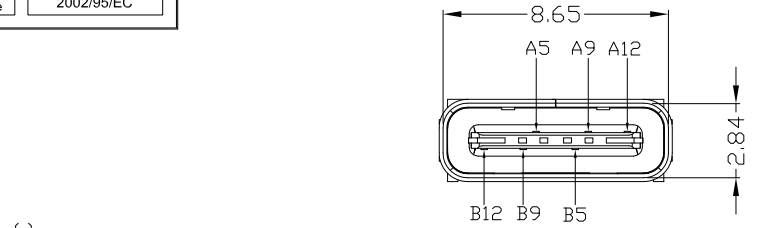

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

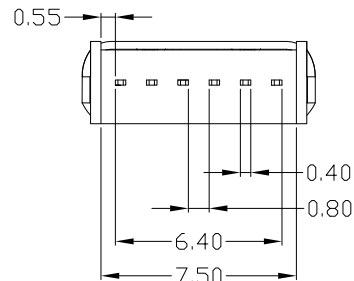

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 3A FOR VBUS; 1.25A FOR GND PIN, 0.25A FOR OTHER, 20V DC MAX;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 40mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 100V AC R.M.S.
- 5) OPERATING TEMPERATURE: -25°C TO +85°C.

2. Mechanical:


- 1) Mating Force: 5N~20N
- 2) Unmating Force: 8N~20N
- 3) Durability: 10,000 cycles

3. DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USCF-061N-4BPZ2X

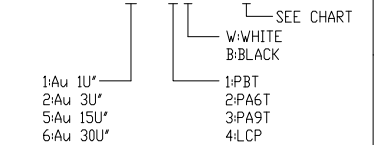

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
4	SHRAPNEL	STAINLESS STEEL	1	PLATED NICKEL
3	SHELL	COPPER ALLOY	1	PLATED NICKEL
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN
1	MOLDING	LCP+30%GF	1	UL94V-0

.X	±0.35	.X*	±1.5*	UNITS	mm
.XX	±0.25	.XX*	±1*	MAT'L	SEE NOTE
.XXX	±0.20	.XXX*	±0.5*	FINISH	SEE NOTE
				Q'TY	

**雅安科技有限公司**  
**ACCURATE INNOTECH INC.**

TITLE: USB TYPE CF 6P 立式插板 10.0&10.5  
PART NO.: USCF-061N-4BPZ2X

DR: Ricky 2020/06/19  
DWG NO.: AII-PZ2X

CHKD: Ricky 2020/06/19  
SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING

APPD:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.