



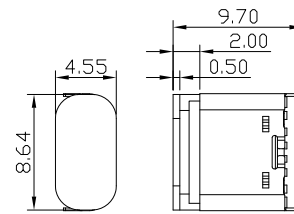





RoHS  
Compliant  
2002/95/EC

Halogen Free


REV.	ECN. NO.	APPD.



加塞子不盖图  
SCALE 2:1

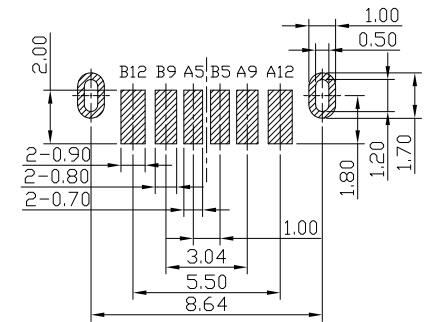

RECOMMEND P.C.B LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm



NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3.0A MAX.
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC.
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 10,000 cycles

3.DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

USCF-061N-4BQ82

1:Au 1U"  
2:Au 3U"  
5:Au 15U"  
6:Au 30U"  
W:WHITE  
B:BLACK  
1-PBT  
2-PA6T  
3-PA9T  
4-LCP


USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING					
5	CAP	LCP+30%GF	1	UL94V-0	X.X	±0.30	X*	±5*	UNITS mm
4	HOUSING	LCP+30%GF	1	UL94V-0	X.XX	±0.20	X.X*	±2*	MAT'L
3	MID PLATE	STAINLESS STEEL	1		X.XXX	±0.10			SEE NOTE
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN					FINISH
1	SHELL	STAINLESS STEEL	1	PLATED NICKEL					SEE NOTE
									Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC



雅安科技有限公司  
ACCURATE INNOTECH INC.

TITLE: USB TYPE CF 6P单排直立式 SMT H=6.5	PART NO.: USCF-06XN-4BQ82
DR: Ricky 2021/09/28	DWG NO.: AII-Q82
CHKD: Ricky 2021/09/28	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING
APPD:	