









RoHS Compliant
2002/95/EC

USCF-061N-4BQZ23	10.0
USCF-061N-4BQZ24	10.5
P/N:	H


REV.	ECN.	NO.	APPD.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2

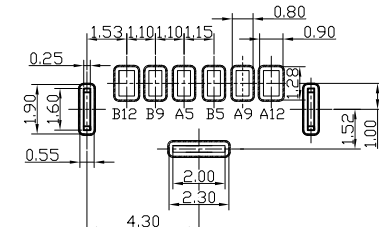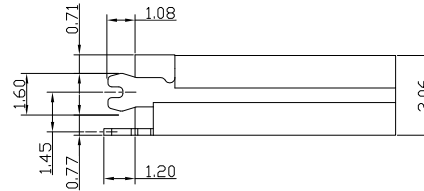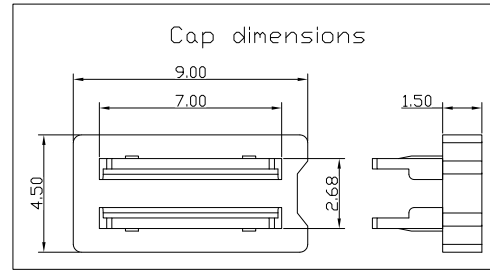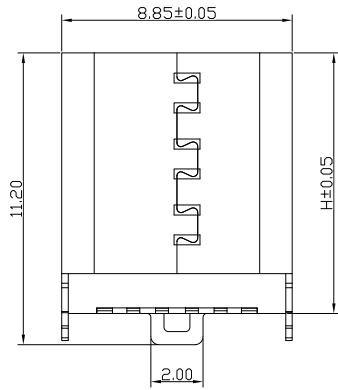

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05



NOTES:

1.ELECTRICAL:

- VOLTAGE CURRENT RATING: 3A FOR VBUS; 1.25A FOR GND PIN. 0.25A FOR OTHER. ,5V DC.
- INSULATION RESISTANCE: 100MΩ MIN.
- CONTACT RESISTANCE: 40mΩ MAX.
- WITHSTANDING VOLTAGE: 100V AC.
- OPERATING TEMPERATURE: -20°C TO +85°C.

2.Mechanical:

- Mating Force: 5N~20N
- Unmating Force: 6N~20N
- Durability: 5,000 cycles

3.DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USCF-061N-4BQZ2*

- SEE CHART
- W:WHITE
- B:BLACK
- 1:Au 1U*
- 2:Au 3U*
- 5:Au 15U*
- 6:Au 30U*
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	MAT'L	SEE NOTE	FINISH	SEE NOTE	Q'TY	UNITS	mm	TITLE	PART NO.:				
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X	±0.20	X'	±5'	UNITS	mm				雅安科技有限公司 ACCURATE INNOTECH INC.	USCF-061N-4BQZ2*				
2	TERMINAL	COPPER ALLOY	6	PLATED GOLD/TIN	.XX	±0.15	.X'	±2'	MAT'L							TITLE:	PART NO.:		
1	HOUSING	LCP+30%GF	1	UL94V-0	.XXX	±0.10			SEE NOTE							USB TYPE CF 6P 立贴 10.0&10.5 三脚单弹	USCF-061N-4BQZ2X		
														DR:	Ricky 2024/07/17	DWG NO.:	A11-QZ2X		
														CHKD:	Ricky 2024/07/17	SCALE	SHEET	REV.	CUSTOMER
														APPD:		1:1	1/1	B	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

