

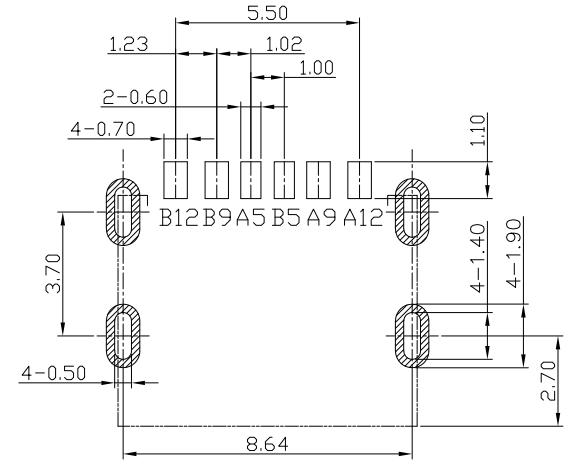
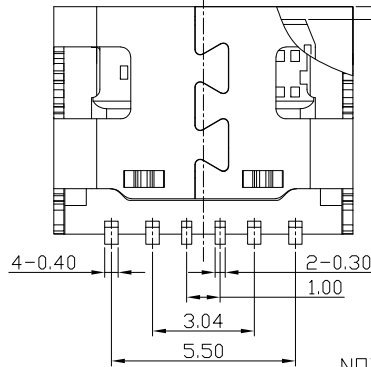
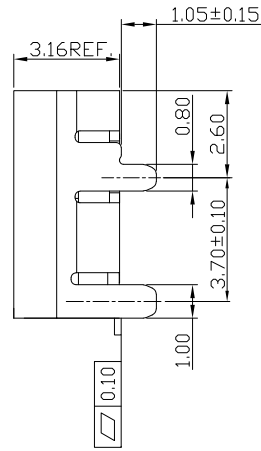
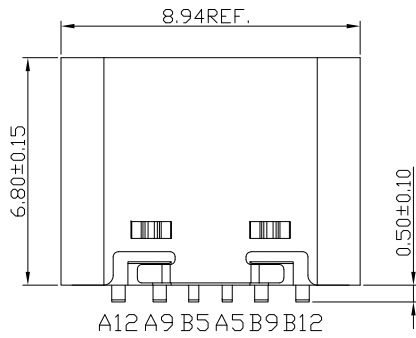


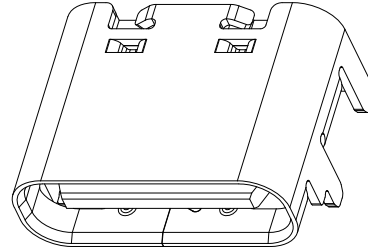


RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

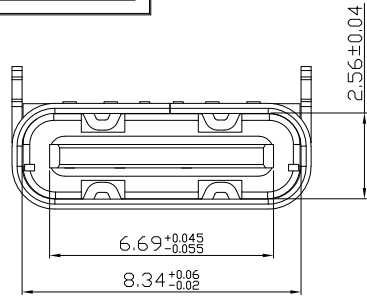

RECOMMENDED P.C.B. LAYOUT

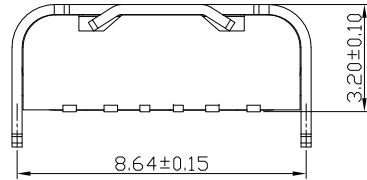

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 3A.
  - INSULATION RESISTANCE: 100MΩ MIN. 150V DC
  - CONTACT RESISTANCE: 40mΩ MAX.
  - WITHSTANDING VOLTAGE: 150V AC / 1mA MAX.
  - OPERATING TEMPERATURE: -40°C TO +85°C.
- MECHANICAL:
  - MATING FORCE: 5N~20N
  - UNMATING FORCE: 8N~20N
  - DURABILITY: 10,000 CYCLES
- DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

USCF-061N-4BVG506

- 1: Au 1U\*  
2: Au 3U\*  
5: Au 15U\*  
6: Au 30U\*
- W: WHITE  
B: BLACK
- 1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

4	HOOK	STAINLESS STEEL	1	
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN
1	MOLDING	LCP+30%GF	1	UL94V-0
NO	PARTS	MATERIAL	QTY	FINISHING

X	±0.5	X*	±2°
X.X	±0.25	X.X*	±1°
X.XX	±0.15		
X.XXX	±0.10		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: USB TYPE CF 6P单排SMT 板上 L=6.8 脚距3.7		PART NO.: USCF-061N-4BVG506	
DR: Ricky 2024/09/20		DWG NO.: AII-VG506	
CHKD: Ricky 2024/09/20		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	