


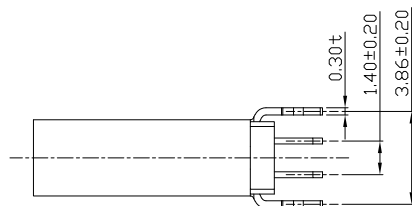






RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

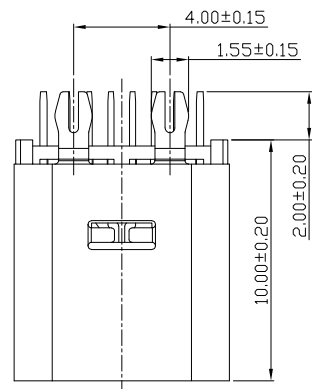

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

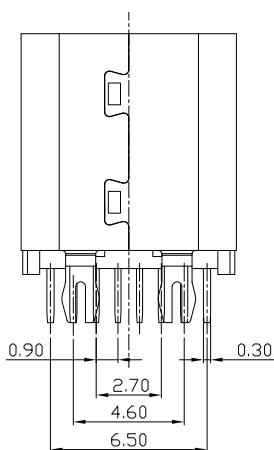

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: 3A MIN FOR VBUS; 5V AC MAX.
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX.
- 4)WITHSTANDING VOLTAGE: 100V AC.
- 5)OPERATING TEMPERATURE:-55°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 5,000 cycles

3.DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

USCF-141N-4BPJ505

1:Au 1U"	W:WHITE
2:Au 3U"	B:BLACK
5:Au 15U"	1:PBT
6:Au 30U"	2:PA6T
	3:PA9T
	4:LCP








Bill of materials:

4	SHILD	STAINLESS STEEL	1		X. ±0.35	X.* ±5°	UNITS	mm	<p align="center">雅安科技有限公司 ACCURATE INNOTECH INC.</p> <p>TITLE: USB TYPE CF 14P 立式插板 四鱼叉脚 H=10.0</p> <p>PART NO.: USCF-14XN-4BPJ505</p> <p>DR: Ricky 2022/04/25</p> <p>CHKD: Ricky 2022/04/25</p> <p>APPD:</p> <p>DWG NO.: AII-PJ505</p> <p>SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING</p>
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.20	.X* ±2°	MAT'L	SEE NOTE	
2	CONTACT	COPPER ALLOY	14	PLATED GOLD/NICKEL	.XX ±0.10	.XX* ±1°	FINISH	SEE NOTE	
1	MOLDING	LCP+30%GF	1	UL94V-0	.XXX ±0.05	.XXX* ±0.5°	Q'TY		
NO	PARTS	MATERIAL	QTY	FINISHING	<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</p>				




RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

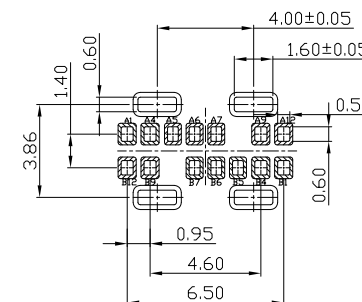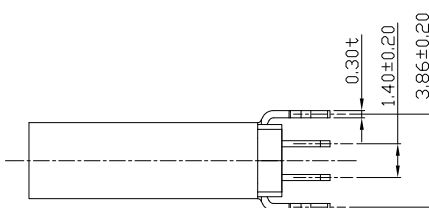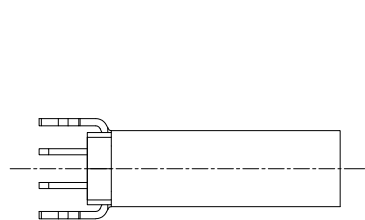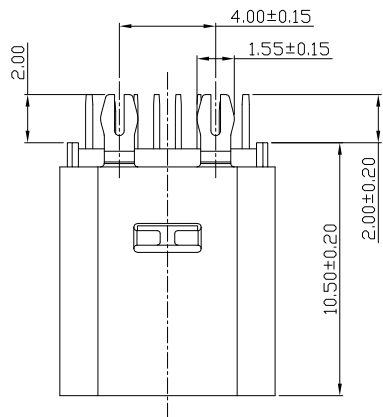

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

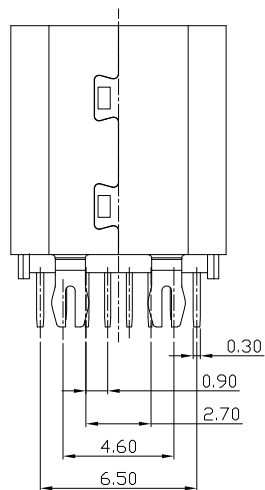

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: 3A MIN FOR VBUS; 5V AC MAX.
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX.
- 4)WITHSTANDING VOLTAGE: 100V AC.
- 5)OPERATING TEMPERATURE:-55°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 5,000 cycles

3.DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

USCF-141N-4BPJ506

- 1:Au 1U"
2:Au 3U"
5:Au 15U"
6:Au 30U"
- W:WHITE
B:BLACK
- 1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

4	SHILD	STAINLESS STEEL	1		X. ±0.35	X.* ±5°	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.25	.X.* ±2°	MAT'L		
2	CONTACT	COPPER ALLOY	14	PLATED GOLD/NICKEL	.XX ±0.20	.XX.* ±1°	SEE NOTE		
1	MOLDING	LCP+30%GF	1	UL94V-0	.XXX ±0.10	.XXX.* ±0.5°	FINISH		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC			Q'TY	

TITLE: USB TYPE CF 14P 立式插板 四鱼叉脚 I=10.5		PART NO.: USCF-14XN-4BPJ506	
DR: Ricky 2022/04/25		DWG NO.: AII-PJ506	
CHKD: Ricky 2022/04/25		SCALE	SHEET
APPD:	1:1	1/1	REV. B
			CUSTOMER DRAWING