

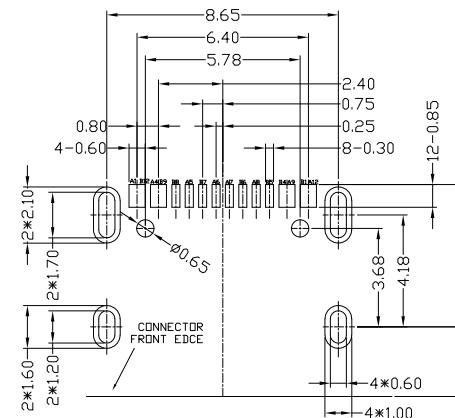

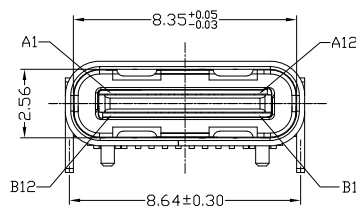





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 3A MAX;
 - INSULATION RESISTANCE: 100MΩ MIN; 250V DC
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 20N MAX.
 - Unmating Force: 8N MIN.
 - Durability: 10,000 cycles
- DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCF-161N-4BVC201

1Au 1U"
2Au 3U"
5Au 15U"
6Au 30U"
W:WHITE
B:BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	.X ±0.30	X.* ±1°	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.						
6									TITLE: USB TYPE CF 单排贴板 16P L=7.35 四脚插板 有柱 外壳无弹片 PART NO.: USCF-16XN-4BVC201						
5								DR: Ricky 2022/04/22 CHKD: Ricky 2022/04/22							
4	MID PLATE	STAINLESS STEEL	1										DWG NO.: AII-VC201		
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL				SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING							
2	CONTACT	COPPER ALLOY	16	PLATED GOLD/NICKEL								APPD:			
1	HOUSING	LCP+30%GF	1	UL94V-0				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							
NO	PARTS	MATERIAL	QTY	FINISHING								Q'TY			
								TO BE CHECKED BY Q.C & IPQC.							