
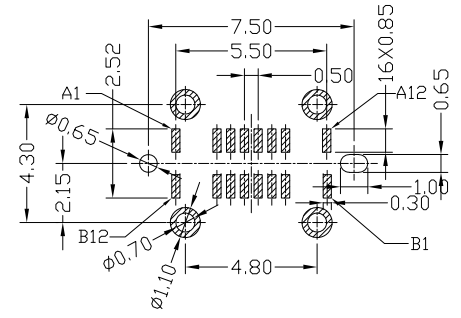
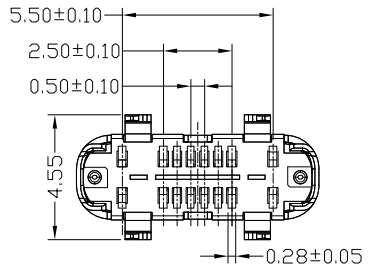

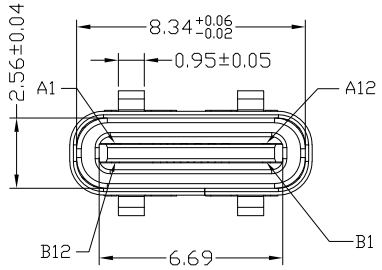
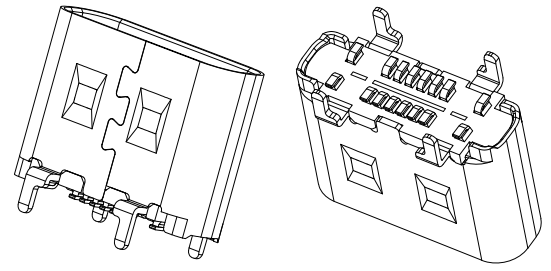
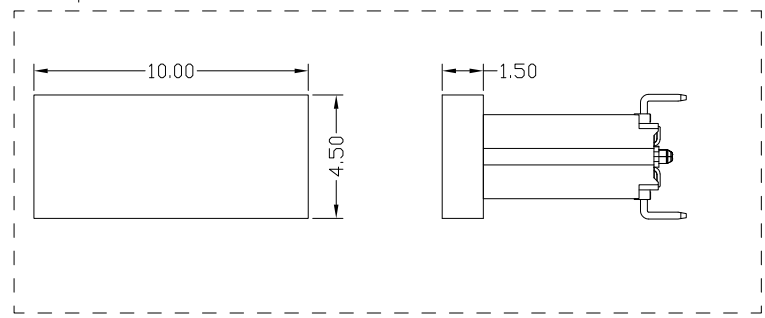



RoHS Compliant
2002/95/EC
Halogen Free

REV.	ECN. NO.	APPD.

Cap dimensions

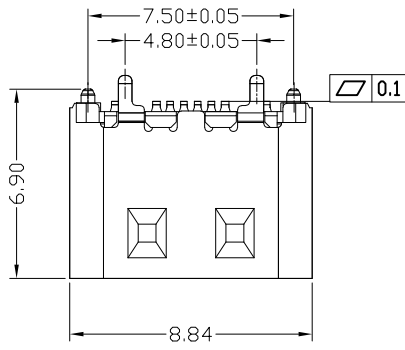

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm
PCB T=1.0MM

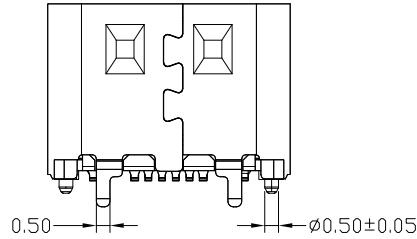

Type c Pin Assignments

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 5.0A FOR VBUS, 1.5A FOR GND, 0.25A FOR OTHERS.
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC MIN;
 - OPERATING TEMPERATURE: -40°C TO +80°C.
 - Mechanical:
 - MATING FORCE: 5N~20N MAX
 - UNMATING FORCE: 8N~20N(INITIAL), 6N~20N(AFTER 10000 CYCLES) MIN.
 - REQUENCE: 200±50 CYCLES /HOUR,10000 CYCLES
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCF-062N-3BQUA860

1Au 1U*
2Au 3U*
6Au 30U*

1PBT
2:PA6T
3:PA9T
4:LCP

W:WHITE
B:BLACK

5	CAP	LCP+30%GF	1	UL94V-0	X.X	±0.15	X°	±1°	UNITS	mm	<p>雅安科技有限公司 ACCURATE INNOTECH INC.</p> <p>TITLE: USB TYPE CF 16P 立點 H6.5</p> <p>PART NO.: USCF-16XN-3BQUA860</p> <p>DR: Ricky 2021/11/29</p> <p>CHKD: Ricky 2021/11/29</p> <p>SCALE SHEET REV. CUSTOMER DRAWING</p> <p>5:1 1/1 B</p>
4	LATCH	STAINLESS STEEL	1		X.XX	±0.10			MAT'L		
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X.XXX	±0.05			SEE NOTE		
2	CONTACT	COPPER ALLOY	16	PLATED GOLD/TIN					SEE NOTE		
1	HOUSING	PA9T+30%GF	1	UL94V-0					Q'TY		
NO	PARTS	MATERIAL	QTY	FINISHING	<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC</p>						