


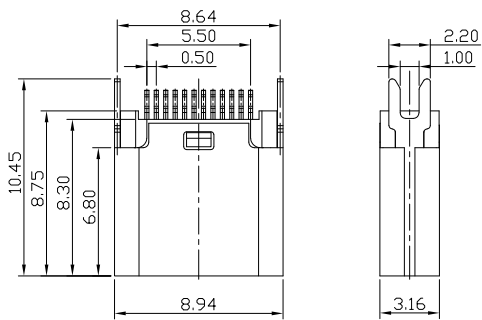






RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

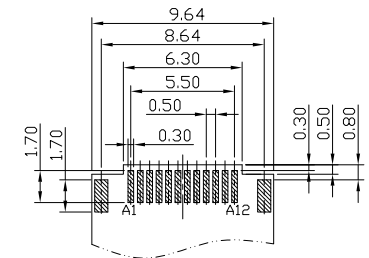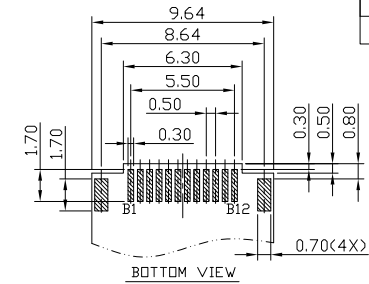

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.00±0.05MM;DEFAULT TOLERANCE:±0.05

NOTES:

1.ELECTRICAL CHARACTERISTICS:

- VOLTAGE RATING: 5 V DC/AC (RMS, max)
CURRENT RATING: 5 AMPS, FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS, FOR ALL OTHER CONTACT.
LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD:50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
- INSULATION RESISTANCE: 100MΩ MIN.
- CONTACT RESISTANCE: 40mΩ Max.
- WITHSTANDING VOLTAGE: AC 100V FOR 1 MINUTE.
- OPERATING TEMPERATURE: -25°C ~ 85°C

2.MECHANICAL CHARACTERISTICS:

- MATING FORCE: 5N~20N.
- UNMATED FORCE: 8N~20N.
- DURABILITY: 10,000 CYCLES.


3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USCF-241N-4BHU36

W:WHITE
B:BLACK

- 1:AU 1U"
- 2:AU 3U"
- 5:AU 15U"
- 6:AU 30U"
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING						
5	EMI PLATE	STAINLESS STEEL	1		.X	±0.30	.X°	±10°	UNITS	mm
4	FRONT SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX	±0.20	.X°	±8°	MAT'L	
3	MID PLATE	STAINLESS STEEL	1		.XXX	±0.10	.XX°	±5°	SEE NOTE	
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN					FINISH	
1	HOUSING	LCP+30%GF	1	UL94V-0					SEE NOTE	
									Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: USB TYPE CF 24P 夹板式1.0 L=8.75 方孔卡扣		PART NO: USCF-24XN-4BHU36	
DR: Ricky 2021/12/27		DWG NO: AII-HU36	
CHKD: Ricky 2021/12/27		SCALE	SHEET
APPD:		1:1	1/1
		REV. B	CUSTOMER DRAWING