

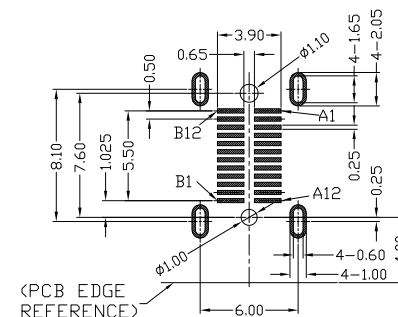

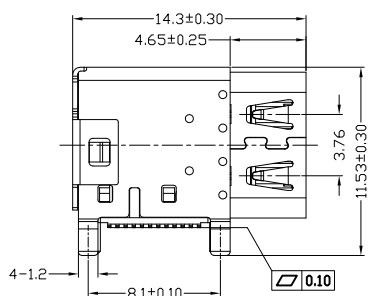



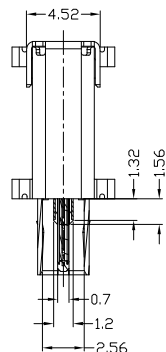

RoHS
Compliant
2002/95/EC

Halogen Free


REV.	ECN.	NO.	APPD.



RECOMMENDED P.C.B LAYOUT
TOLERANCE ± 0.05mm (TOP VIEW)

PIN ASSIGNMENT:

PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTxp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	DN2
A7	Dn1	B6	DP2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND



NOTES:

1.ELECTRICAL:

- CURRENT RATING: 5.0A FOR Vbus PIN, 1.25A FOR Vconn PIN, 0.25A FOR OTHER PINS.
- INSULATION RESISTANCE: 100MΩ MIN.
- CONTACT RESISTANCE: 40mΩ MAX.
- WITHSTANDING VOLTAGE: 100V AC MIN.
- OPERATING TEMPERATURE: -40°C TO +85°C.

2.MECHANICAL:

- MATING FORCE: 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES

3.DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCF-242N-4BM80

1:Au 1U"
2:Au 3U"
5:Au 15U"
6:Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING			UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
6					.X	±0.30	X.	±5'	TITLE: USB TYPE CF 24P 侧插式 普通款 双贴	PART NO.:			USCF-24XN-4BM80
5	EMI	STAINLESS STEEL	1	PLATED NICKEL	.XX	±0.20	.X	±2'		DWG NO.:			
4	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX	±0.10			DR:	Ricky 2023/04/27			
3	MID PLATE	STAINLESS STEEL	1	PLATED NICKEL					CHKD:	Ricky 2023/04/27			
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD					APPD:	Ricky 2023/04/27			
1	HOUSING	LCP+30%GF	1	UL94V-0					SCALE	SHEET	REV.	CUSTOMER	
									1:1	1/1	B	DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

