

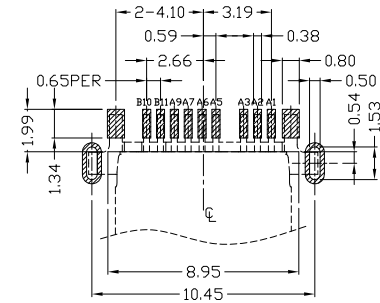
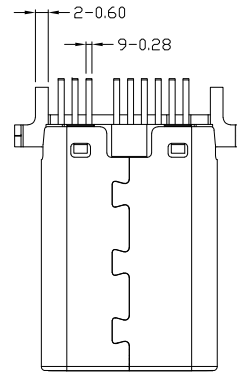



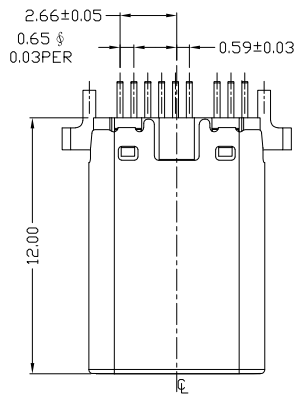


**RoHS Compliant**  
2002/95/EC

REV.	ECN.	NO.	APPD.

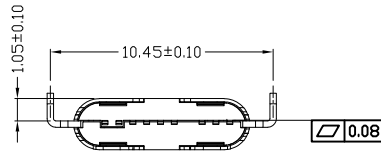

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm



USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4		B9	
A5	CC1	B8	
A6	Dp1	B7	
A7	Dn1	B6	
A8		B5	
A9	Vbus	B4	
A10		B3	
A11		B2	
A12		B1	

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: 5A MAX FOR VBUS/GND PIN; 0.9A MAX FOR OTHER PIN.
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 200V AC 60S/MIN, 0.5mA Max;500V DC 60S/MIN,100ΩMAX
- 5)OPERATING TEMPERATURE:-40°C TO +85°C.

2.MECHANICAL:

- 1)MATING FORCE:5N~20N
- 2)UNMATING FORCE:6N~20N
- 3)DURABILITY: 10,000 CYCLES

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USCM-091N-4BVS64



6	EMI PLATE	STAINLESS STEEL	1	PLATED NICKEL	X.	±0.25	X.'	±3'
5	HOOK	STAINLESS STEEL	1	PLATED NICKEL/TIN	.X	±0.20	.X'	±2'
4	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX	±0.15	.XX'	±1'
3	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XXX	±0.08		
2	JACKET	LCP+30%GF	1	UL94V-0				
1	HOUSING	LCP+30%GF	1	UL94V-0				
NO	PARTS	MATERIAL	QTY	FINISHING				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.:		
Q'TY	SEE NOTE	DR:	USCM-09XN-4BVS64		
APPD:	[Signature]	CHKD:	AII-VS64		
		SCALE	SHEET	REV.	CUSTOMER DRAWING
		1:1	1/1	B	