








RoHS Compliant
2002/95/EC





Halogen Free


REV.	ECN.	NO.	APPD.

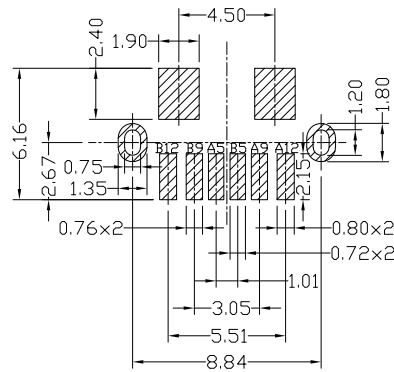


PCB LAYOUT



Ring dimensions

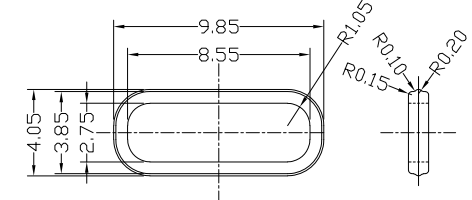

Cap dimensions

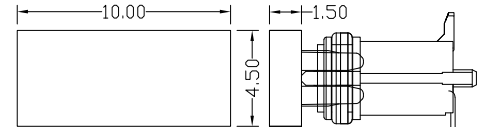

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1.25A, PARALLELED FOR A TOTAL OF 3A;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -40°C TO +80°C.
 - Mechanical:
 - Mating Force: 5N~20N MAX
 - Unmating Force: 8N~20N(INITIAL), 6N~20N(AFTER 10000 CYCLES) MIN.
 - FREQUENCY: 200±50 CYCLES/HOUR, 10000 CYCLES
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

- 4.PART NO.
- UWCF-062N-4BQUA820
- W:WHITE
B:BLACK
- 1:AU 1U"
2:AU 30"
6:AU 30U"
- 1:PBT
2:PA6T
3:PA9T
4:LCP
- T:TIN
N:NICKEL

NO	PARTS	MATERIAL	QTY	FINISHING	TOLERANCES	ANGLES	UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.			
6							mm	TITLE: USB CF WATERPROOF 单排6P立贴		PART NO.: UWCF-06XN-4BQUA820	
5	COVER	LCP+30%GF	1	BLACK	.X ±0.15	X.' ±1'	MAT'L	DR: Ricky 2020/03/19		DWG NO.: AII-QUA820	
4	RING	SILICON	1	RED	.XX ±0.10		SEE NOTE	CHKD: Ricky 2020/03/19		SCALE SHEET REV. CUSTOMER 5:1 1/1 B DRAWING	
3	SHELL	ZINC ALLOY	1	PLATED NICKEL	.XXX ±0.05		FINISH	APPD:			
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN			SEE NOTE				
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC						