










RoHS Compliant
2002/95/EC




Halogen Free

REV.	ECN.	NO.	APPD.

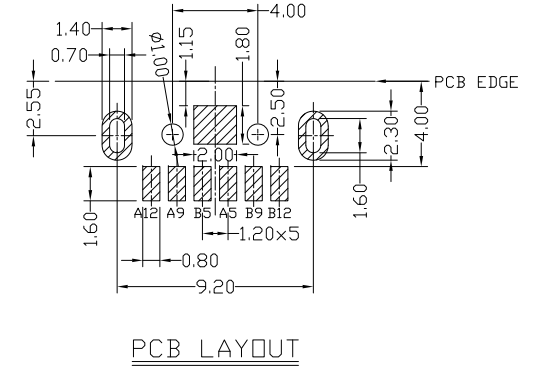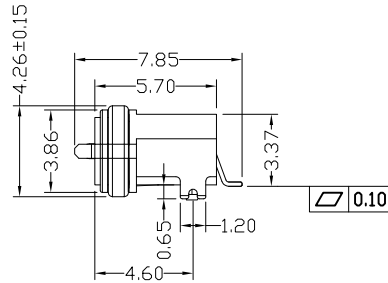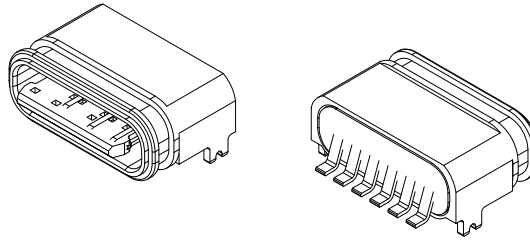

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- ELECTRICAL:
 - CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 3A MAX
VBUS AND GND CONTACTS RATED AT 0.5A MIN
0.9AMPS MAX. FOR ALL OTHER CONTACT,
PARALLELED FOR A TOTAL OF 5A;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC MIN;
 - OPERATING TEMPERATURE: -40°C TO +80°C.
 - MECHANICAL:
 - MATING FORCE: 5N~20N MAX
 - UNMATING FORCE: 8N~20N(INITIAL),
6N~20N(AFTER 10000 CYCLES) MIN.
 - REQUEUCE: 200±50 CYCLES/HOUR,10000 CYCLES
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



6					
5					
4	RING	SILICON	1	RED	
3	SHELL	ZINC ALLOY	1	PLATED NICKEL	
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN	
1	HOUSING	LCP+30%GF	1	UL94V-0	
NO	PARTS	MATERIAL	QTY	FINISHING	

TOLERANCES	ANGLES	UNITS
.X ±0.15	X.' ±1'	mm
.XX ±0.10		MAT'L
.XXX ±0.05		SEE NOTE
		FINISH
		SEE NOTE
		Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: USB CF WATERPROOF 单排6P 卧式		PART NO.: UWCF-06XN-4BVUA817	
DR: <i>Ricky</i> 2024/08/07		DWG NO.: AII-VUA817	
CHKD: <i>Ricky</i> 2024/08/07		SCALE	SHEET
APPD:	REV. B	5:1	1/1
	CUSTOMER DRAWING		