

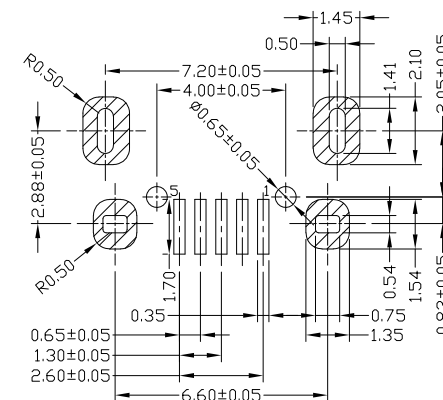







RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



RECOMMENDED PCB LAYOUT



NOTES:

1.ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP MAX. ,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN.
- 3) CONTACT RESISTANCE: 30mΩ MAX. INITIAL; 40mΩ MAX.
- 4) WITHSTANDING VOLTAGE: 100V AC MIN FOR 1 MIN.
- 5) OPERATING TEMPERATURE: -30°C TO +80°C.

2.MECHANICAL:

- 1) MATING FORCE: 35N MAX
- 2) UNMATING FORCE: 10N MIN. INITIAL 8~20N AFTER

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-051N-4BHG3098

1: Au 1U* W: WHITE
6: Au 30U* B: BLACK
T: TIN 1:PBT
N: NICKEL 2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.												
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X.	±0.50	X'	±1*	SEE NOTE	TITLE:	MICRO USB B TYPE F 5P 牛角外 2.0 7.2 6.6 有柱 加长0.7	PART NO.:	MUYF-051N-4BHG3098						
2	HOUSING	LCP+30%GF	1	UL94V-0	.X	±0.20				DR:	Ricky 2023/2/10	DWG NO.:	AII-HG3098						
1	TERMINAL	COPPER ALLOY	5	PLATED NICKEL/GOLD	.XX	±0.10				CHKD:	Ricky 2023/2/10	SCALE	1:1	SHEET	1/1	REV.	A	CUSTOMER DRAWING	
					.XXX	±0.03			SEE NOTE	APPD:									
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC			Q'TY		APPD:									